


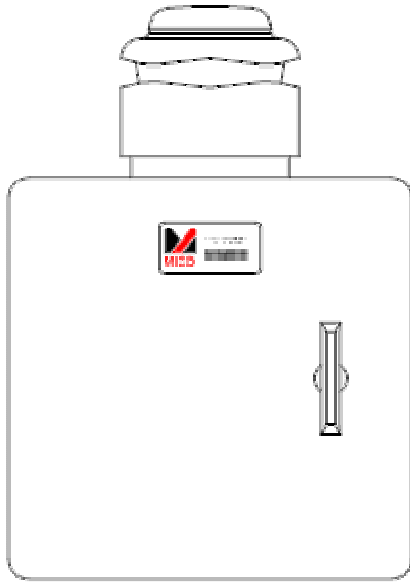

ELECTRONIC CONTROL BOX

**OPERATION**

The electronic control box contains systems to give the Mico fail safe/fail secure electro-mechanical multi-point locking complete flexibility of operation with ease of installation. This wall mounted unit is ideally positioned near to the head of the door frame. The control box contains the following optional features:-

- Input 240 volts ac – 12/24 volts dc.
- Continuously rated low voltage transformer.
- Delayed egress.
- Sounder.
- Strobe light.
- Re-set button.
- Lockable wall mounted cabinet.
- Input signal from remote alarm switch.
- 12 volt battery back up

Operation of the Mico multi-point lock will activate the alarm and/or strobe light. The optional facility to delay egress from 0 secs up to 10 minutes automatically activates at the same time. A remote signal from the building alarm system will immediately override the delayed egress in the event of an emergency. The system can be re-set by the key-holder.

APPLICATIONS

Suitable for use in areas where delayed egress is required or alarm activation in the event of operation of the Mico multi-point electro-mechanical locking system. Ideally suitable for toy stores where children may at times be un-supervised or retail stores to deter unauthorised use.