




SURFACE MOUNTED 3 POINT LOCKING WITH PUSH PAD

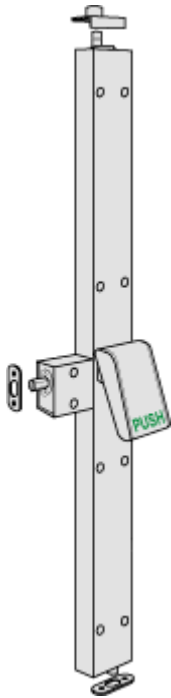

OPERATION

Pressing the pad, which has the instruction PUSH on the point of use, immediately retracts the locking shoots at the top, bottom and on the leading edge of the door. This emergency exit device allows for fast, single action operation to open the door. The unique light action automatic bolting upon door closure is fitted as standard. The independently sprung bolts are steel, non-tapered with a 23mm throw, offering a high level of safety without compromising security.



APPLICATIONS

Suitable for use in areas where occupants are likely to be familiar with the operation of the emergency exit device. The light single action, ease of operation makes the MICO three point ideal for single escape doors requiring a higher level of security. Examples include local authorities, retail stores, retail parks, computer rooms, small industrial units and store rooms.

Conforms to all the requirements of BS EN 179 Certified to CE No. 37601341A

DIMENSIONS

Standard height of 2150mm (can be reduced on site to suit)
 Extension kits also available, increasing the height to 3000mm
 Non-standard height single piece units readily available to separate instructions.
 Push plate width = 800mm (suitable for door widths 925mm - 1300mm)
 Other widths readily available to order (push plate can be cut to size on site or in a workshop)
 Mechanism zinc plated steel. External housings are aluminium.

HANDING

This system is handed (LH or RH)

OPTIONS

Microswitching	To order specify: 942-3P MS (self handing)
Key Dogging	To order specify: 942-3P DC
External Access	See external devices
Fixings	High security dowel fixings available. To order specify: 94210-3P
Receivers	Dust proof and rim fixed receivers readily available. See optional accessories.
Finishes	SAA finish supplied as standard. Wide range of other metallic and coloured (RAL) finishes available. Please ask for details.

Drawing Not to Scale.

