




# SURFACE MOUNTED PANIC BOLT WITH FULL WIDTH PUSH PLATE

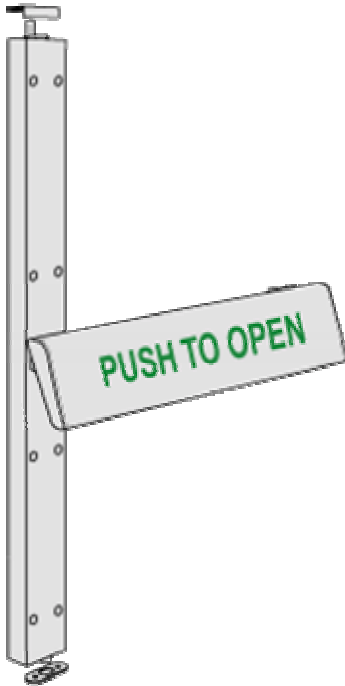

## OPERATION

Pressing the full width push plate, which has the instruction PUSH TO OPEN on the point of use, immediately retracts the locking shoots at the top and bottom on the leading edge of the door. This emergency panic exit device allows for fast, single action operation to open the door. The unique light action automatic bolting upon door closure is fitted as standard. The independently sprung bolts are steel, non-tapered with a 23mm throw, offering a high level of safety without compromising on security.



## APPLICATIONS

Suitable for use in areas where members of the public, in the event of a panic situation may not be familiar with the operation of the emergency panic exit device. The light action for ease of escape makes the MICO two point locking ideal for many applications, particularly for use by local authorities, retail stores, restaurants, schools and sports halls.

For use on single doors, and double doors with plain meeting stiles.


Conforms to all the requirements of BS EN 1125 Certified to CE No. 37601321A

## DIMENSIONS

Mechanism zinc plated steel. External housings are aluminium.

Standard height of 2150mm (can be reduced on site to suit)  
 Extension kits also available, increasing the height to 3000mm  
 Push plate width = 800mm (suitable for door widths 925mm - 1300mm)  
 Other widths readily available to order (push plate can be cut to size on site or in a workshop)

Mechanism zinc plated steel. External housings are aluminium.

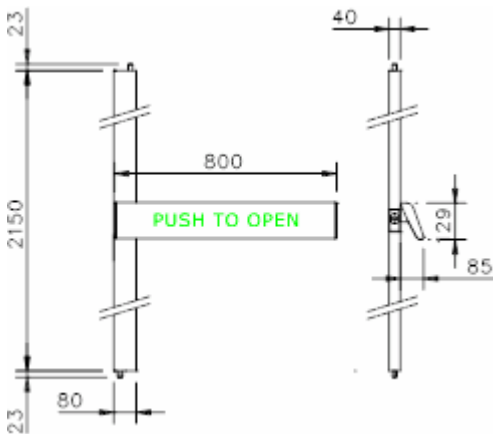

## HANDING

This unit is handed (LH or RH)

## OPTIONS

- Microswitching**
- Key Dogging**
- External Access**
- Double Doors**

## Finishes

To order specify: 942 MS (self handing)

To order specify: 942 DC

See optional accessories.

Order 2 x MICO 942 on double doors with plain meeting stiles.

SAA finish supplied as standard. Wide range of other metallic and coloured (RAL) finishes available. Please ask for details.