




**SURFACE MOUNTED EMERGENCY EXIT HARDWARE FITTED WITH PUSH PADS FOR DOUBLE DOORS**

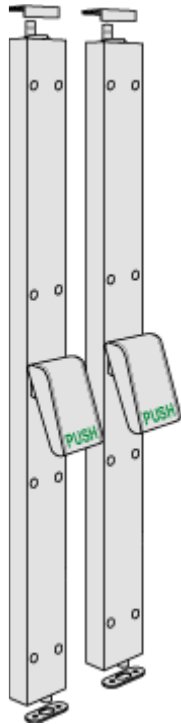

**OPERATION**

This emergency panic exit device for double doors allows for fast easy operation to open the doors in the event of a panic emergency. A MICO 942 two-point emergency exit panic bolt is fitted to each door leaf. Pressing the full width push plate, which has the instruction PUSH TO OPEN on the point of use, immediately retracts the locking shoots at the top and bottom on the leading edge of the door. This emergency panic exit device allows for fast, single action operation to open the door. The unique light action automatic bolting upon door closure is fitted as standard. The independently sprung bolts are steel, non-tapered with a 23mm throw, offering a high level of safety without compromising on security.

**APPLICATIONS**

Suitable for use in areas where members of the public, in the event of a panic situation may not be familiar with the operation of the emergency panic exit device. The light action for ease of escape makes the MICO four point locking ideal for many applications. Examples include local authorities, use by the elderly and disabled, retail stores, store rooms, plant rooms, sports halls and function rooms.

For use on double doors with plain meeting stiles.

Conforms to all the requirements of BS EN 1125 Certified to CE No. 37601321A

**DIMENSIONS**

Standard height of 2150mm (can be reduced on site to suit)  
Extension kits also available, increasing the height to 3000mm

Mechanism zinc plated steel. External housings are aluminium.

**HANDING**

This unit is self handing

**OPTIONS**

**Microswitching**  
**Key Dogging**

To order specify: 942P MS

To order specify: 942P DC

**External Access**  
**Finishes**

See optional alternatives.

SAA finish supplied as standard. Wide range of other metallic and coloured (RAL) finishes available. Please ask for details.

Drawing Not to Scale.

