




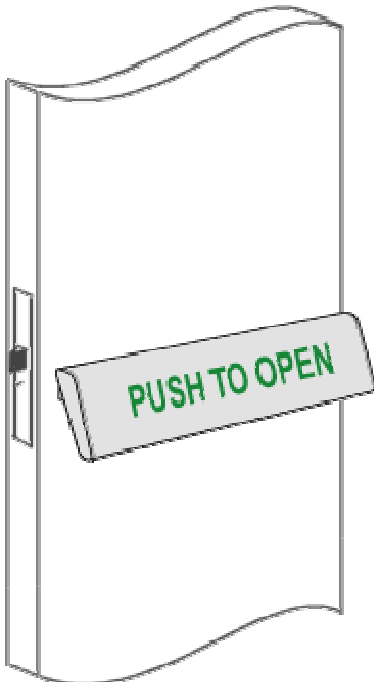

FLUSH FITTING PANIC LATCH WITH FULL WIDTH PUSH PLATE AND SINGLE POINT LOCKING

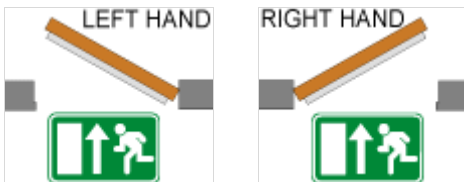

Drawing Not to Scale. Drawing shows outward opening unit.

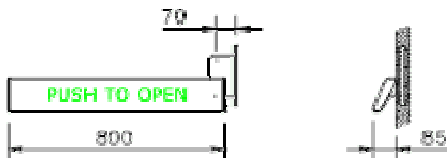

OPERATION

Pressing the full width push plate, which has the instruction PUSH TO OPEN on the point of use, the emergency panic exit device allows for fast, single action operation to open the door. Supplied with an 8761 x 70mm backset modular lockset which, combined with the flush fitting MICO 944 panic latch offers easy operation whilst maintaining a high level of security.

APPLICATIONS

Suitable for use in areas where members of the public, were in the event of a panic situation may not be familiar with the operation of the emergency panic exit device. The light action for ease of escape makes the MICO panic latch ideal for many applications, particularly for use by the elderly and disabled, in restaurants, schools and workshops.

Conforms to all the requirements of BS EN 1125 Certified to CE No. 37601322A

DIMENSIONS

Mechanism zinc plated steel. External housings are aluminium.

HANDING

This unit is handed (LH or RH)
Suitable for use on single doors

OPTIONS

- Microswitching**
- Key Dogging**
- External Access**
- Double Doors**
- Finishes**

To order specify: 944 MS (LH or RH)
 To order specify: 944/8762 x 70mm lockset
 Key cylinder to separate instructions
 Order SO944 - see MICO 942/SO44
 SAA finish supplied as standard. Wide range of other metallic and coloured (RAL) finishes available. Please ask for details.