



Abryll PE

The MICO Abryll Range of single-point, surface fitted **Panic & Emergency (PE)** devices offers single handed means of escape should an emergency event arise.

Push bar, Push pad, Full width push plate and heavy duty lever handle options are all available to meet the mandatory BS EN 179 Emergency escape and BS EN 1125 panic escape standards. An anti-thrust mechanism prevents the bolt from being forced back to open door.



Abryll PE 1

OPERATION

Entry Method: (Optional) outside access devices (OAD) options available from key driven to pad-lockable devices.

Exit Method: Single action to escape at all times via Push bar, push pad, full width push plate or heavy duty lever handle.

FEATURES

- Tested to over 1,000,000 cycles
- Surface fitted
- Adjustable roller snib to take up variants in frame gap
- Optional Bolt status micro-switch



Abryll PE 2

BENEFITS

- Built in anti-thrust mechanism for enhanced security
- Tested and approved up to SR6 (on selected doorsets)
- Emergency escape versions fully tested and certified to BS EN 179:2008 and CE/UKCA Marked
- Panic escape versions fully tested and certified to BS EN 1125:2008 and CE/UKCA Marked




Abryll PE 3



Product Performance Chart - Indicates product has been certificated or tested & approved as part of a complete doorset assembly																								
LPS 1175									SECURITY															
Issue 7	SR1	SR2	SR3	SR4	SR5	SR6	SR7	SR8	LPS 1673 (AR.)					FEBR (min)	EN 1627	STS 202	PAS 24	LPS 2081	SAFETY	BALLISTIC	BLAST	FIRE	CORROSION	CYCLES
Issue 8	A	B	C	D	E	F	G	H	TIME	A	B	C	D											
20 Min									300 SEC															
15 Min									240 SEC					60	RC6	BR6			EN 1125	EN 1522 FB1-7	ISO 16933 EXV 15/25	UL 10C	GR5	1 MIL
10 Min	A10	B10	C10	D10	E10				180 SEC						RC5	BR5		SRB					GR4	
5 Min									120 SEC					15	RC4	BR4			EN 179	UL 752 Level 1-10		EN 1634-1	GR3	500K
3 Min									60 SEC						RC3	BR3					ASTM F2927 Cat 1	CERTIFIRE	GR2	
1 Min									30 SEC					5	RC2	BR2		SRA	UL 305	NIJ 0108.01 Level 1-4		BS 476-22	GR1	200K
															RC1	BR1								


TECHNICAL DRAWINGS

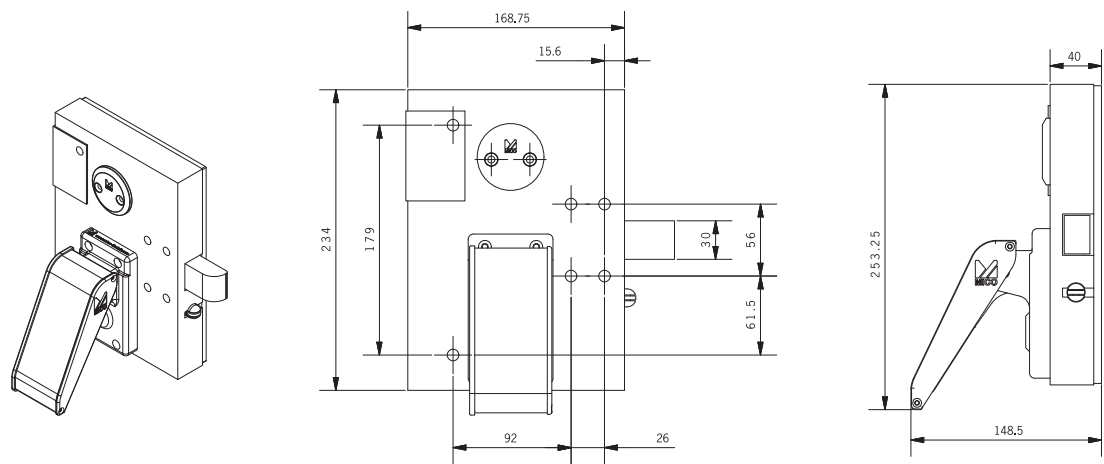

CODING SYSTEM

The MICO Abryll has a simple code that covers the chosen methods of entry and exit, followed by additional options.

Example Order Code – MICO Abryll PE1

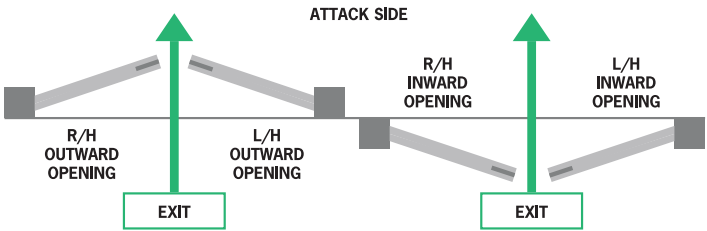

Range	Bolts	Exit	Entry	Additional Options
MICO ABRYLL	1	PE1 - Emergency push pad	-	(BSM) Bolt status micro switch
		PE2 - Panic Full width push plate		
		PE3 - Emergency Heavy duty lever		
		PE6 - Stainless steel push bar		
		PE8 - Stainless steel pad		

EXAMPLE ENTRY/EXIT DIRECTIONS

