

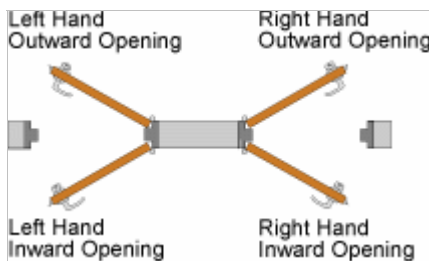


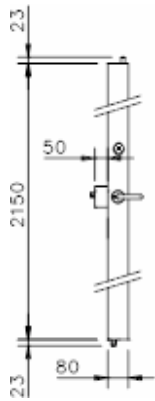

SAFETY AND SECURITY WITH STYLE

MICO 942-3L INT MD

# SURFACE MOUNTED 3 POINT LOCK WITH LEVER HANDLE AND INTEGRATED MANUAL DEADLOCK



## OPERATION

This multi-point locking device allows for fast, double action operation to open the door. The unique light action automatic bolting is fitted as standard which automatically deadlocks the bolts in the locked position when the door is closed. When unlocked (by key from the outside or thumbturn from the inside), the actuator may be operated to unlock the door. The bolts deadlock automatically when the door closes again. The unique light action automatic bolting upon door closure is fitted as standard. The independently sprung bolts are steel, non-tapered with a 23mm throw, offering a high level of security without compromising safety. An internal micro switch can be fitted, which may be connected to the alarm system, monitors the bolt status whether the unit is locked or unlocked.



## APPLICATIONS

Suitable for use in areas of high security 'lock and leave' applications where the door should automatically be deadlocked to prevent access to non-key holders. The light double action, ease of operation makes the MICO three point ideal for buildings requiring a higher level of security. Examples include bureau de change, cash centres, building societies and computer software rooms, central government departments, computer supermarkets, retail stores, retail parks, bureau de change, cash centres, building societies and computer software rooms, retail premises and buildings.

## DIMENSIONS

Standard height of 2150mm (can be reduced on site to suit)  
 Extension kits also available, increasing the height to 3000mm  
 Non-standard height single piece units readily available to separate instructions.  
 Push plate width = 800mm (suitable for door widths 925mm - 1300mm)  
 Other widths readily available to order (push plate can be cut to size on site or in a workshop)  
 Mechanism zinc plated steel. External housings are aluminium.

## HANDING

This unit is handed (LH or RH)

## OPTIONS

<b>Microswitching</b>	Micro switching of deadlock and bolt status available (MS). N/A
<b>Key Dogging</b>	
<b>External Access</b>	By key cylinder and external handle (cylinder specified separately).
<b>Fixings</b>	Hgh security dowel fixings available. To order specify: (10)
<b>Receivers</b>	Dust proof and rim fixed receivers readily available.
<b>Finishes</b>	SAA finish supplied as standard. Wide range of other metallic and coloured (RAL) finishes available. Please ask for details.

HIGH SECURITY MULTI POINT LOCKING SYSTEMS